





CIRCULAR VIBRATORY SCREEN VER SERIES

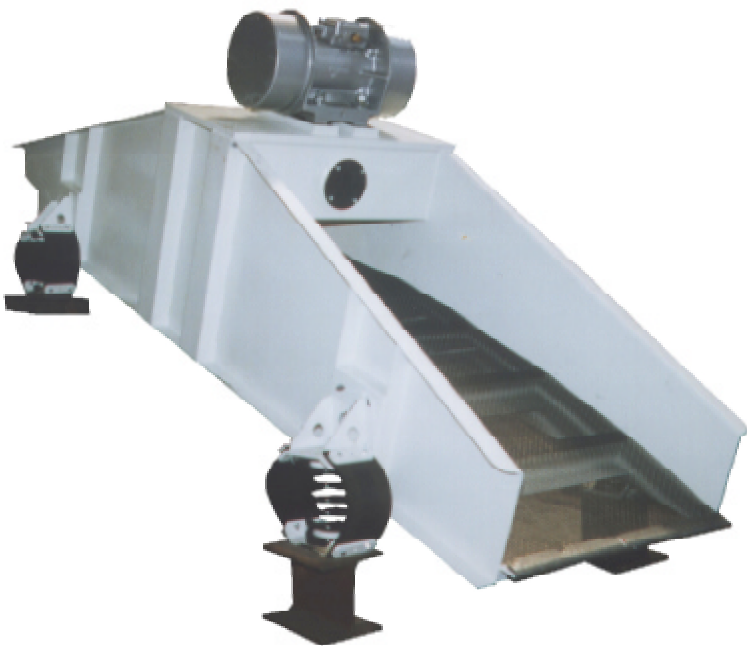

- ☞ The circular vibratory screens are medium-small with only one screening deck.
- ☞ The operation is by one eccentric weights motor, with upward installation, which produces a rotary-type vibration.
- ☞ The screen is installed with downward inclination of ab. 18°.
- ☞ They are suitable for medium capacities and for cuts at 2 to 50 mm.
- ☞ The circular vibratory screens are in open or closed execution and may be foreseen with a washing plant complete with sprayers.
- ☞ For the particular stretching system, the wire-netting may be replaced in a few minutes.

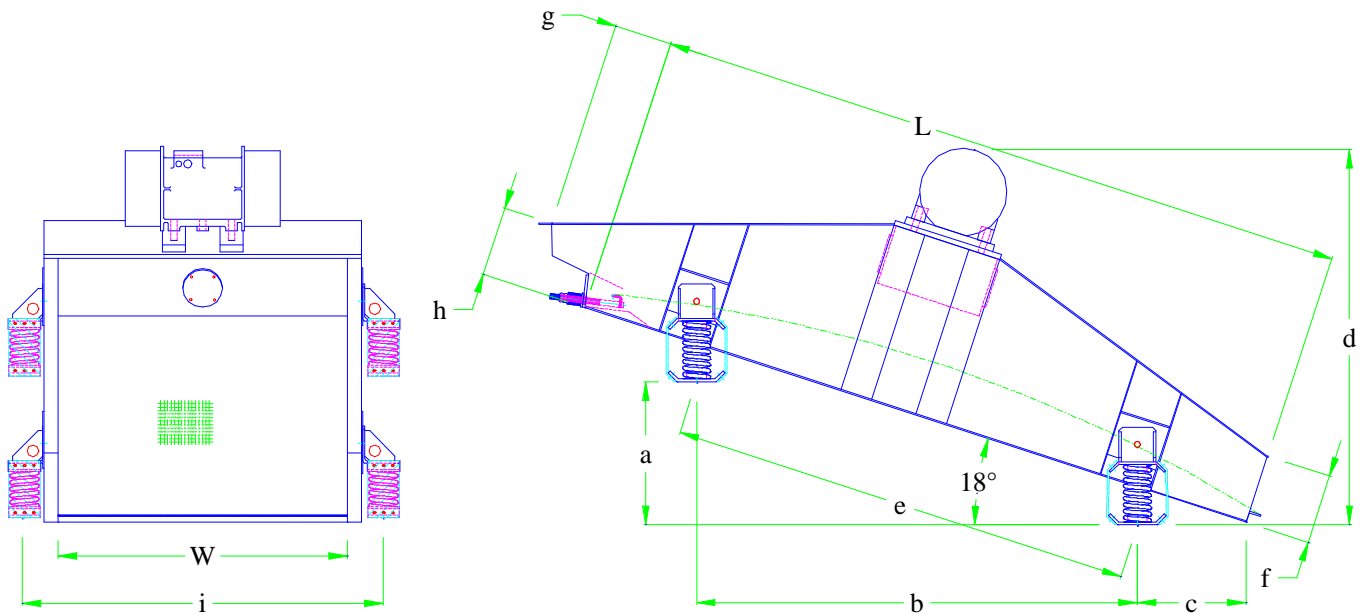

W / L	a	b	c	d ab.	e	f	g	h	i	Screening surface	kg ab.	kW
VER 600x2000	420	1305	300	1300	1360	280	250	300	890	1,2 m ²	480	1x1,25
VER 800x3000	620	1900	470	1600	2000	300	250	300	1110	2,4 m ²	750	1x1,7
VER 1000x2000	465	1425	180	1540	1500	300	245	290	1310	2 m ²	690	1x1,7
VER 1000x3000	620	1900	470	1620	2000	300	250	300	1310	3 m ²	900	1x2,7
VER 1250x3000	620	1900	470	1620	2000	300	250	300	1560	3,7 m ²	970	1x2,7
VER 1250x3500	710	2185	565	1855	2300	310	250	300	1560	4,3 m ²	1020	1x2,7
VER 1500x3500	710	2185	565	2000	2300	350	250	300	1810	5 m ²	1250	1x4,7

The execution of circular vibratory screens and, therefore, the dimensions of same will change according to the particular use which they are studied and planned for.

